




CALIFORNIA  
ACCENT  
LIGHTING  
INC

± 0.15" Tolerance

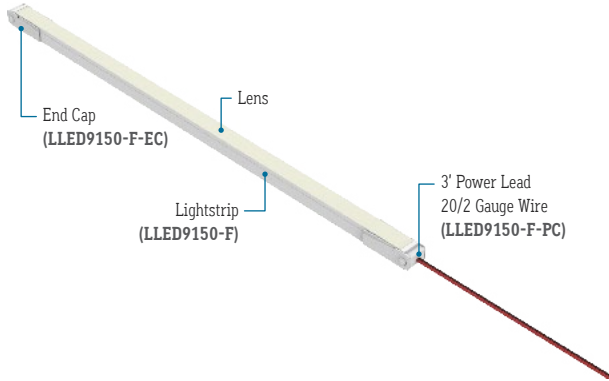

**FEATURES**

<b>APPLICATIONS</b>	Accent, Decorative Lighting
<b>LAMP TYPE</b>	LEDs
<b>CRI</b>	>90
<b>LENS</b>	100% Frosted
<b>VIEWING ANGLE</b>	120°
<b>MOUNTING</b>	Mounting Clips (Sold Separately)
<b>CONSTRUCTION</b>	Flexible Lightstrip
<b>CUT INCREMENT</b>	3-1/4"
<b>LENGTH</b>	Built to Order
<b>LISTING</b>	Dry, Wet, or IP67 Location UL2108, CSA C22.2 #9 UL8750, CSA250
<b>INSTALLATION</b>	<a href="#">Link to Installation Instructions</a>
<b>ELECTRICAL</b>	
<b>DIMMING</b>	Forward / Reverse Phase, 0-10V, Lutron, DMX, DALI
<b>MAXIMUM RUN</b>	65' (0.9W, 1.3W, 3W)
<b>VOLTAGE</b>	24V DC
<b>DRIVER</b>	Remote (Sold Separately)
<b>TEMPERATURE RATINGS</b>	Operating / Startup: -20° to 48°C (-4° to 120°F) Storage: -40° to 76°C (-40° to 170°F)

# LLED9150-F

ACCENT  
& COVE

PROJECT

TYPE



SINGLE  
BIN  
+30K




- ✓ TM-30
- ✓ LM-79
- ✓ LM-80


**LAMP SPECIFICATIONS**

LAMP NUMBER	CORRELATED COLOR TEMPERATURE	EFFICACY (LUMENS / WATT)	JA8	L70 LED LIFE
2.7K	2700K Warm White	41	Yes	60,000 hrs.
3.0K	3000K Warm White	41	Yes	60,000 hrs.
3.5K	3500K Neutral White	41	Yes	60,000 hrs.
5.0K	5000K Cool White	41	No	60,000 hrs.
A	Amber	41	No	40,000 hrs.
R	Red	41	No	40,000 hrs.
G	Green	41	No	40,000 hrs.
B	Blue	41	No	40,000 hrs.

**END VIEW**



**LENS**



SERIES	LENS	WATTS PER FOOT	DIMMING	CCT LED	LISTING	FIXTURE LENGTH*7
LLED9150	- F	-	-	-	-	-
LLED9150	100% Frosted Lens: Line of Light (F)	0.9W: 36 Lumens per Foot (0.9W)  1.3 Watts: 53 Lumens per Foot (1.3W)  3 Watts: 123 Lumens per Foot (3W)	Forward / Reverse Phase (PH) 0-10V: 100% - 1% (10V)  Hi-Lume 1% 2 Wire*1 (LTEA) Hi-Lume 1% 3 Wire*2 (L3DA)  Hi-Lume Premier 0.1%*3 (L3D0) JA8 0-10V (JA8-10V) JA8 Hi-Lume 1% 2 Wire (JA8-LTEA) DMX-512*4 (DMX) DALI*5 (DALI)  Leave Blank for Non-Dimming	2700K (2.7K) 3000K (3.0K) 3500K (3.5K) 5000K (5.0K)  Amber (A) Red (R) Green (G) Blue (B)	Indoor (DRY)  Outdoor*6 (WET)  Outdoor IP67*6 (IP67)	Specify Length in Feet & Inches (3-1/4" Increments)

\*1 (LTEA) 40 watt max Lutron Hi-Lume 1% 2 Wire #LTEA4U1UKL-CV240

\*2 (L3DA) 40 watt max Lutron Hi-Lume 1% 3 Wire #L3DA4U1UKL-CV240

\*3 (L3D0) 96 watt max Hi-Lume Premier 0.1% #L3D0-96W24V-U

\*4 Consult third party DMX commissioner to modify DMX address at time of installation. CALI does not provide DMX commissioning.

\*5 DALI commissioning to be performed by a third party. CALI does not provide DALI commissioning.

\*6 Run lengths required for Wet Location & IP67 products

\*7 Due to cut increment restrictions, run lengths that deviate from the cut increment will be sized to the nearest smaller increment. **Example:** 6'-8" will be sized to 6'-6"

**CALIFORNIA ACCENT LIGHTING, INC.**

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.






CALIFORNIA  
ACCENT  
LIGHTING  
INC

# LLED9150-F | ACCENT & COVE

## ACCESSORIES (Sold Separately)

Note: Connector type subject to change without notice




Wet Splice Connector  
(LLED9150-F-SC-WET)


PART NUMBER	WEIGHT	SPECIFY LENGTH	SPECIFY QUANTITY	UNIT
LLED9150-F-SC-WET	0.009 lbs each	N/A		Each
LLED9150-F-MC				Each
LLED9150-F-UC		N/A		Each

## MOUNTING OPTIONS (Sold Separately)

Click image to view installation information

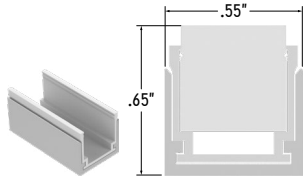

Mounting Clip  
(LLED9150-F-MC)

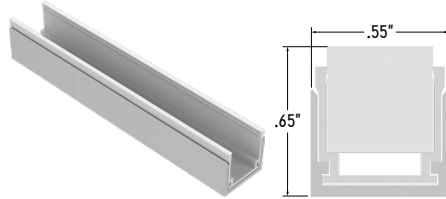



Mounting Channel  
(LLED9150-F-UC)

## DESIGN GUIDELINES

Individual Run



Run with Continuous Connector

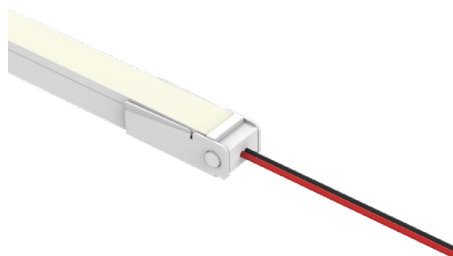

Detail A  
Power Connector  
(LLED9150-F-PC)



Detail B  
Dry Splice Connection  
(Connectors by Others)



Detail C  
Wet Splice Connection  
(LLED9150-F-SC-WET)

### CALIFORNIA ACCENT LIGHTING, INC.

2820 E. Gretta Lane, Anaheim, CA 92806

ph. 800.921.CALI (2254) | fx. 714.535.7902 | info@calilighting.com | calilighting.com

© CALI. All rights reserved. CALI reserves the right to make changes or withdraw specifications without prior notice.

